

LOW VOLTAGE INSULATOR


Appearance



Specification

- Material: Bulk molding compound (BMC)
- Working Temperature: 200°C
- Dielectric strength: 5000V

Measurement & Drawing

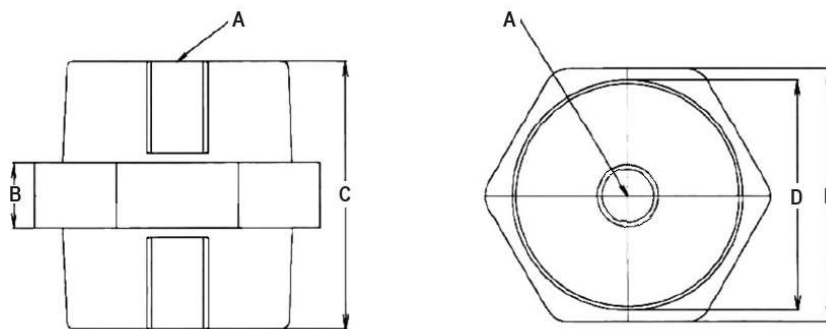

Dimension(mm)

Low Voltage Insulator					
Model	A	B	C	D	E
RM-25	M6	10	25	26	29.3
RM-35	M8	8	35	30	33
RM-51	M8	13.3	51	34	37
RM-76	M10	16	76	47.5	51.5

Esumo Electric Co., Ltd

📍 FACTORY: Nankan Rd., Nankan Industrial Park, Luzhu Township, Taoyuan County, Taiwan

📍 OFFICE: Minquan E. Rd., Neihu Dist., Taipei City 114040, Taiwan

✉ sales@esumoelec.com.tw

www.esumoelec.com.tw